



I. Oilfree compressors / Compressed air solutions

- DTS** Pressure range 4 - 10,5 bar g
Types 7 - 9 - 11 - 13 - 14 - 20
double-stage oilfree compressor
Airflow 690 - 1.970 m³/h @ 7 bar g
Installed power 75 - 200 kW
driven via belt ("B"), air ("A") or water cooled ("W")
- DTS** Types 25 - 31 - 35
double-stage oilfree compressor
Airflow 2.000 - 3.150 m³/h @ 7 bar g
Installed power 250 - 355 kW
driven via gearbox ("G"), air ("A" max. 250 kW) or water cooled ("W")
- VMT** Types 1 - 2 - 3 - 4 - 6 - 8
double-stage oilfree compressor
Airflow 1.250 - 8.100 m³/h @ 7 bar g
Installed power 160 - 900 kW
driven via gearbox ("G"), air ("A" max. 250 kW) or water cooled ("W")
- VMW** Types 15 ...46 - 56 - 70 - 80 - 81 - 90 - 110
single-stage oilfree compressor, water injected
Airflow 140 - 1.170 m³/h @ 7 bar g
Installed power 15 - 110 kW
direct driven, air or water cooled
- Compr. Stations** Oilfree Compressors, adsorption/ refrigeration dryers, filters, air receivers, control systems, piping
Project Management, Installation, Commissioning, Services

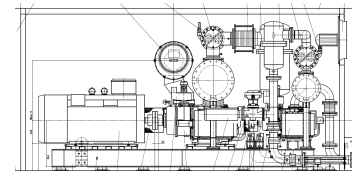

- AIR AUDIT** Measurements, simulations and consultancy of existing compressed air net work
- Airends VMX and VMW airends/stages/ bare shafts for Compressors are sold by AERZEN headquarter

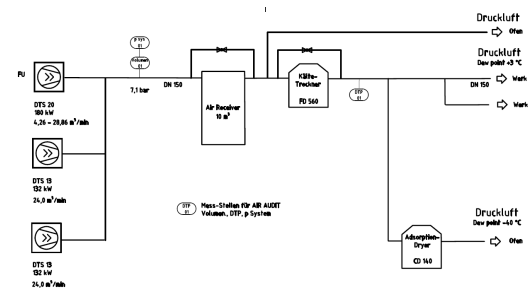

II. Compressors for BIOGAS applications

- VMX - Skid** Types 75 - 110 - 250
single-stage oil injected compressor
Airflow 350 - 1.750 m³/h @ 9 bar g
Installed power 75 - 250 kW
direct driven, air or water cooled

